

# Material Data Sheet


## PETG



# MATERIAL 4PRINT

your filament experts

- Layer adhesion
- Weather resistance
- Easy to print
- Heat resistance
- Tensile strength
- Impact resistance

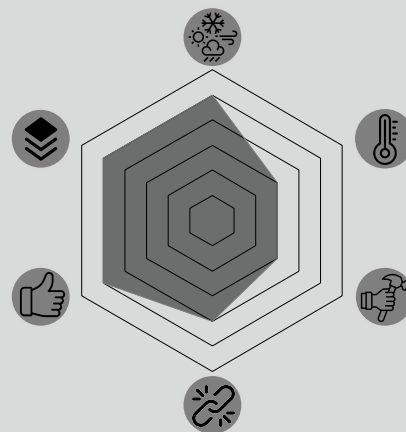

## Description

Polyethylenterephthalat (PET) is a thermoplastic Material, which the most people know in form of PET-bottles. PETG is a glycol-modified PET, which is known for transparency and it is nearly undestroyable. It is easy to print like PLA and in terms of mechanical characters even a bit better than ABS.

## Identification

Name	PETG
Chemical Name	Polyethylenterephthalat + Glykol
Usage	FDM 3D Printing
Manufacturer	Material 4 Print GmbH & Co. KG, Germany

## Properties

Test	Value	Method
Specific Gravity	1,27 g/cm <sup>3</sup>	ASTM D792
Elongation at Break	70%	ASTM D638
Tensile Strength	53 MPa	ASTM D638
Flexural Modulus	2150 MPa	ASTM D790
Melting Point	200 - 230 °C	ASTM D3418
Heat Distortion Temperature	70 °C	ASTM D648
Flammability	HB	UL-94

If you have any further questions about the product or problems in its use, please contact [info@material4print.de](mailto:info@material4print.de)



### Certificate



Certification depends on colors in the final product. More info in the additional information sheet.

### Storage

Store at room temperature, out of direct heat and sunlight and in a dry place.

### Print Settings

Nozzle Temperature: 225-255 °C  
Bed Temperature: 60-80 °C

These data were taken from the raw material manufacturer.

12.04.2021

[www.material4print.de](http://www.material4print.de)

Contact: [info@material4print.de](mailto:info@material4print.de)